

INSTRUCTION FOR USE CARABINERS

TYPE XD-8122N/XD-8122TN/XD-8122D

WARNING

- Activities involving the use of this equipment are inherently dangerous and can lead to severe injury or even death. You must be responsible for your actions and decisions.
 - Read and understand the instructions before use.
- Before using this product, it is essential to have got adequate training, understood and mastered the basics and techniques.
- This product must not be used beyond its limits, nor be used for any purpose other than for which it is designed.
- If you have any doubts or difficulties in understanding this manual, please contact XINDA.
- Zhejiang Bingfeng Outdoor Product Co., LTD
Phone number: +86 400-8856993
No.19 Xinchao Road, Wangjiang Community, Baiyun Street, Dongyang City, Jinhua City, Zhejiang Province, China.

-1-

Turn the cylinder and unlock.

CARABINER WITHOUT LOCKING SYSTEM:

- Solid gate: Springback closing.
- Steel wire gate: Wire gate deformation closing.

STRENGTH:

MBS stands for minimum breaking strength.

- 

Major axis MBS: The minimum breaking strength for the major axis when the gate is closed.
- 

Minor axis MBS: The minimum breaking strength for the minor axis when the gate is closed.
- 

Gate opening MBS: The minimum breaking strength for the major axis when the gate is open.

(see strength on the table)

	XD-8122D	XD-8122N	XD-8122TN
Major axis MBS	25kN	25kN	25kN
Minor axis MBS	8kN	8kN	8kN
Gate opening MBS	7kN	7kN	7kN

Each carabiner has been proof-tested under 10kN.
Note: Two steel pins(10mm or 12mm) are used in the

-5-


- use because of misuse, accidents or compatibility problems.
- The practical lifespan depends on the type and intensity of usage, harsh environment (marine environment, extreme temperatures, sand and mud etc.). Equipment check has great effect on the lifespan. The comprehensive inspection is required once every 12 months minimum, apart from normal check before use, during use and after use. The greater the intensity of use, the more checks you need. Record the results of the inspection.
 - The inspector must be competent or authorized by the manufacturer.
 - Inspections included:
 - a).Check if the products are free of corrosion, melting, cracks, wear, deformation or stain(the spine's wear can not be over1mm);
 - b).Check if the gate works or rotates well;
 - c).Check if the markings are illegible;
- You should maintain or retire the equipment, or hand to the manufacturer for further inspection when the results are negative such as deformation, malfunction of the gate.

INFORMATION INCLUDED ON THE INSPECTION MANUAL

Model number/data matrix/purchase date/manufacture date/first time to use/standards/inspection date/records (malfunction, condition, user's usage record) /results and

-9-

MARKING

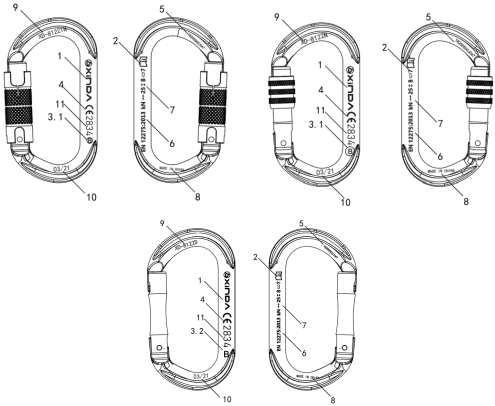

-  : Brand name;
-  : Logo to remind the user to read the instructions;
-  : Carabiner type;
-  : In compliance with European legislation regulation(EU) 2016/425;
- 5.1825500J047 : Tracking code;
- 6.EN12275:2013 : European used standard;
- 7.↔ : Min. major axis strength – gate closed;
↑ : Min. minor axis strength;

-2-

pulling tests of carabiners. The breaking strength will be lower under off-spine loading such as webbings or bars.

WLL(Working Load Limit) is suggested to be 1/10-1/5 of the MBS, which is also based on the rope access standards or regulations.

COMPATIBILITY:

- Carabiners are used as connecting elements in personal fall protection systems, i.e. fall arrest, work positioning, rope access, restraint and rescue systems. Good compatibility means good functional interaction. Different shaped carabiners are suited to different equipment and environment. For instance, O-shaped carabiners are for devices which have two parallel plates; Screw gate carabiners are for harsh environment; Auto lock carabiners work well when they are frequently opened and closed and come into contact with foreign objects.
- Aluminum carabiners are lighter and fine for most situations and the environment where handiness is required. Steel carabiners are heavier, stronger and more durable.
- Maillon links are only suitable for half permanent anchoring and need regular checks on the gate closing.
- Quickdraws are used in climbing safety system; the lower carabiners (bent gate carabiners with rubber holder) can be connected to ropes and the upper one (straight gate carabiners) can be connected to anchors.

suggestions (to retire the equipment or not)/next inspection date/inspector's data (name and contact).

WHEN TO RETIRE YOUR EQUIPMENT:

- You don't know its usage history.
- You doubt about its performance, strength or safety.
- It fails to pass PPE inspection.
- Malfunctions are found.
- It fails to meet updated regulations or standards.
- It has been subjected to a major fall or load.

HOW TO RETIRE YOUR EQUIPMENT

Mark it with irremovable labels or destroy it as to prevent further use. For instance, drill or cut it. Or return it to the manufacturer for disposal.


RESPONSIBILITIES

- You are responsible for your actions and decisions. If you cannot take the responsibilities, don't use it.
- Only qualified person or one under supervision of a competent and experienced person can use this product.
- You must take training course including theory and practice, basics for working at height, proper ways to use and relevant safety system knowledge before use.
- When it is resold to other countries or regions, the instruction manual must be made in local languages.

-10-

-  : Min. major axis strength – gate opened;
- 8.MADE IN CHINA : Country of origin;
- 9.XD8122D/XD8122N/XD8122TN : Model number;
- 10.03/21: Month and year of production;
- 11.2834 : The number of the notified body carries out product quality management according to Module D;

NOMENCLATURE

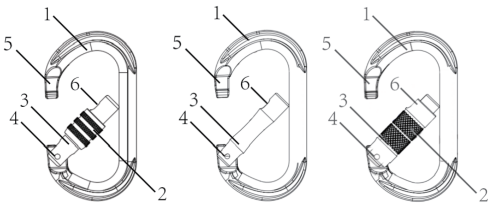

- Spine
- Locking system(screw gate/double action/triple action)
- Gate
- Gate axis
- Keylock nose
- Keylock eye

-3-

- The rope should go through the quickdraw outwards.

SAFETY CHECK

Before each use :

- Verify that the condition of the gate, the spring, the main body, the nose are free of wear, cracks, deformation, corrosion...
 - Verify that there are no foreign objects in the eye and the locking system works well.
- Note: The wear of the coated surface will accelerate the process of oxidation and corrosion.
- ##### During each use:
- Verify that the carabiner is clipped into other equipment;
 - Verify that the gate closes well and no other foreign objects will obstruct the locking system;
 - Verify that the load is on the major axis;
 - Verify that there is no complicated loading such as leverage pressure, extrusion or cross loading.
- Warning : Any foreign objects or shocks might unlock the carabiner.

ADDITIONAL INFORMATION:

- The user's health and body condition must be fit for working at heights. Unconscious suspension at height can lead to severe injury or even death. Ensure that a rescue procedure is in place.

5).XINDA is not responsible for any direct or indirect non-quality induced consequences.

STORAGE AND TRANSPORT:

Remaining fluid and other stain on metal equipment must be rinsed and dried and then stored in a dry environment. The equipment must not come into contact with abrasion, load, chemicals, sharp edges or heat source etc. as those are inherently harmful. Metal equipment must be specially stored in the container and transported in compliance with storage requirements.

The use and storage of the product is suggested to be taken care of by accountable people.

MAINTENANCE

- Proper maintenance and storage can extend the lifespan of the equipment and also guarantee the user's safety.
- Wear treatment: You can polish the carabiner surface with sandpaper when it is worn by sharp metal (like hangers), becoming rough or having cracks.
Note: The depth of the wear or cutting nick cannot be over 1mm!
 - Cleaning: Use clean water (20°C) and soft brush to rinse the external and internal of the product. No high-pressure water. No industrial-grade cleansers. Rinse afterwards and dry it naturally. No heat drying.

-11-

TEXT OF THE INSTRUCTION

APPLICATION:

- Carabiner belongs to PPE (personal protective equipment) which is designed for climbing, caving, canyoning, rope access and rescue.
- EN12275:2013 is the standard of mountaineering equipment connectors.
- Warning: Carabiners can not be used for industrial hoisting.
- This product is compliant with **EN 12275:2013 and the Personal Protective Equipment Regulation (EU) 2016/425**.
- The Notified body who carries out EU Type-examination (Module B) and Conformity to type based on quality assurance of the production process ((Module D) is: **CCQS Certification Services Limited (Notified body: 2834)**, located at Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland.
- The **EU DECLARATION OF CONFORMITY** can be accessed via www.xindasafety.com.
- Acceptable temperature: -20 C~50 C .

CARABINER WITH LOCKING SYSTEM:

- Screw gate: Turn the rotating cylinder by hand to lock.
- Double action gate: The cylinder can be self-locking.

-4-

- The pulley effect should be taken into consideration when climbing. Any impact on the climber will increase the loading on the top anchor by 1.7times.
- In the industrial use, the breaking load of a single anchor point must be 12kN at least or meet the standards of EN 795. The position of anchor should be higher than the user's connection. In a fall arrest system, it is essential to take the length of carabiners into consideration and check the required clearance below the user in order to avoid any impact with the ground or with an obstacle in case of a fall.
- In a safety system, the weakest component determines the strength of the whole system.
- Avoid that the rope and other braided fabric rub against sharp edges or rough surfaces.
- A risk assessment is needed, and protection measures should be taken before use.
- Working alone is not allowed, and you should have a rescue plan and the means to implement it in case of encountered difficulties.

LIFE SPAN, REGULAR INSPECTION AND RETIREMENT:

- No storage limit for the metal in the proper environment; the plastic parts of the equipment can be stored up to 10 years and the rubber parts can be up to 3 years.
- The equipment may need to be retired only after one

- Long time use of the equipment will reduce the lubrication of the parts such pivots. Lubricating oil or grease is suggested to be in use.
- Warning: No modification, alternation or improper maintenance is allowed. It can only be repaired in the XINDA factory.

TRACEABILITY:

The code is used for product tracing.
Meaning: For instance, 26 096883 500J 47: 26 : Manufactured on the year of 2026; 096883500J: Batch and quality inspection; 47: Product increment.

LIMITED WARRANTY:

XINDA provides a 3-year warranty against any material or manufacturing defects. Exclusions: normal wear and tear, deformation, oxidation, modifications or alterations, misuses, incorrect storage, poor maintenance, uses for which this product is not designed.

-12-