

## INSTRUCTION FOR USE - CARABINERS

### TYPE XD-Q9628

ver.202607/A

#### WARNING

○Activities involving the use of this equipment are inherently dangerous and can lead to severe injury or even death. You must be responsible for your actions and decisions.

○Read and understand the instructions before use. Before using this product, it is essential to have got adequate training, understood and mastered the basics and techniques.

○This product must not be used beyond its limits, nor be used for any purpose other than for which it is designed.

If you have any doubts or difficulties in understanding this manual, please contact XINDA.

Zhejiang Bingfeng Outdoor Product Co., LTD  
Phone number: +86 400-8856993  
No.19 Xinchao Road, Wangjiang Community, Baiyun Street, Dongyang City, Jinhua City, Zhejiang Province, China.

-1-



Major axis MBS: The minimum breaking strength for the major axis when the gate is closed.



Minor axis MBS: The minimum breaking strength for the minor axis when the gate is closed.



Gate opening MBS: The minimum breaking strength for the major axis when the gate is open.

(see strength on the table)

#### COMPATIBILITY:

○Carabiners are used as connecting elements in personal fall protection systems, i.e. fall arrest, rope access, restraint and rescue systems. Good compatibility means good functional interaction . Different shaped carabiners are suited to different equipment and environment. carabiners are for climbing; Screwgate carabiners are for harsh environment; Auto lock carabiners work well when they are frequently opened and closed and come into contact with foreign objects.

○Aluminum carabiners are lighter and fine for most situations and the environment where handiness is required.

○Warning:The connector cannot be opened when under load.

○Verify that this product is compatible with the other elements of the system in your application (compatible = good functional interaction).Equipment used with your connector must meet current standards in your country (e.g. EN 354 lanyard for work).

#### SAFETY CHECK

-5-

○You must take training course including theory and practice, proper ways to use and relevant safety system knowledge before use.

○When it is resold to other countries or regions, the instruction manual must be made in local languages.

○XINDA is not responsible for any direct or indirect non-quality induced consequences.

#### STORAGE AND TRANSPORT:

Remaining fluid and other stain on metal equipment must be rinsed and dried and then stored in a dry environment. The equipment must not come into contact with abrasion, load, chemicals, sharp edges or heat source etc as those are inherently harmful. Metal equipment must be specially stored in the container and transported in compliance with storage requirements.

The use and storage of the product is suggested to be taken care of by accountable people.

#### MAINTENANCE:

Proper maintenance and storage can extend the lifespan of the equipment and also guarantee the user's safety.


-Wear treatment: You can polish the carabiner surface with sandpaper when it is worn by sharp metal (like hangers) , becoming rough or having cracks.

Note: The depth of the wear or cutting nick can not be over 1mm!

-Cleaning: Use clean water(20℃) and soft brush to rinse the external and internal of the product. No high-pressure water. No industrial-grade cleansers. Rinse afterwards and

-9-

#### MARKING

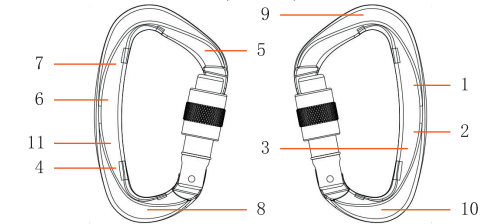

-  Brand name
-  Logo to remind the user to read the instructions
-  Carabiner type
-  In compliance with European legislation regulation(EU) 2016/425
- 5.1825500J047 Tracking code
- 6.EN12275:2013 European used standard
- 7.↔ Min. major axis strength – gate closed
- ↑ Min. minor axis strength
- ↗ Min. major axis strength – gate open
- 8.MADE IN CHINA Place of origin is China
- 9.Model number 10.07/20 10 Month and year of production
- 11.2834 The number of the notified body carries out product quality management according to Module D

-2-

**Before each use:**  
- Verify that the condition of the gate, the spring, the main body, the nose are free of wear, cracks, deformation, corrosion...  
- Verify that there are no foreign objects in the eye and the locking system works well.  
Note: The wear of the coated surface will accelerate the process of oxidation and corrosion.

**During each use:**  
- Verify that the carabiner is clipped into other equipment;  
- Verify that the gate closes well and no other foreign objects will obstruct the locking system;  
- Verify that the load is on the major axis;  
- Verify that there is no complicated loading such as leverage pressure, extrusion or cross loading.  
Warning: Any foreign objects or shocks might unlock the carabiner.

#### ADDITIONAL INFORMATION:

○The user's health and body condition must be fit for working at heights. Unconscious suspension at height can lead to severe injury or even death. Ensure that a rescue procedure is in place.

○The pulley effect should be taken into consideration when climbing. Any impact on the climber will increase the loading on the top anchor by 1.7times.

○The position of anchor should be higher than the user's connection. In a fall arrest system, it is essential to take the length of carabiners into consideration and check the required clearance below the user in order to avoid any

dry it naturally. No heat drying.  
-Long time use of the equipment will reduce the lubrication of the parts such pivots. Lubricating oil or grease is suggested to be in use.  
Warning: No modification, alternation or improper maintenance is allowed. It can only be repaired in the XINDA factory.

#### TRACEABILITY:


The code is used for product tracing.  
Meaning: For instance, 26096500J47: 26096: 500J: Batch and quality inspection; 47: Product increment.manufacturing defects. Exclusions: normal wear and tear, deformation, oxidation, modifications or alterations, misuses, incorrect storage, poor maintenance , uses for which this product is not designed.

#### LIMITED WARRANTY:

XINDA provides a 3-year warranty against any material or manufacturing defects. Exclusions: normal wear and tear, deformation, oxidation, modifications or alterations, misuses, incorrect storage, poor maintenance , uses for which this product is not designed.

-10-

#### NOMENCLATURE

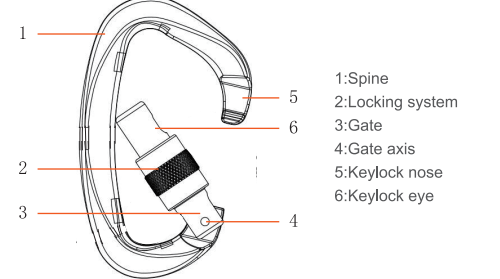

#### TEXT OF THE INSTRUCTION

- It is for the carabiners listed on the following form.
- Any misuse may lead to severe injury or even death.

| NO.     | Maj or MBS (kN) | Min or MBS (kN) | Opening MBS (kN) | Gateope ningdia (mm) | Weight (g) | Outorl ength (mm) | Outer width (mm) | Class acc. to EN12275 :2013 | UIAA 121 | Mate rial |
|---------|-----------------|-----------------|------------------|----------------------|------------|-------------------|------------------|-----------------------------|----------|-----------|
| XDQ9628 | 25              | 8               | 7                | 16                   | 60         | 100               | 60               | B                           | /        | AL        |

Note: The surface of carabiners are coated.

#### APPLICATION:

-3-

impact with the ground or with an obstacle in case of a fall.  
○In a safety system, the weakest component determines the strength of the whole system.  
○Avoid that the rope and other braided fabric rub against sharp edges or rough surfaces.  
○A risk assessment is needed and protection measures should be taken before use.  
○One is not allowed and you should have a rescue plan and the means to implement it in case of encountered difficulties.

#### LIFE SPAN, REGULAR INSPECTION AND RETIREMENT:

- No storage limit for the metal in the proper environ-ment;
- The equipment may need to be retired only after one use because of misuse, accidents or compatibility problems.
- The practical lifespan depends on the type and intensity of usage, harsh environment(marine environment, chemicals,extreme temperatures, sand and mud etc). Equipment check has great effect on the lifespan.
- The comprehensive inspection is required once every 12 months minimum, apart from normal check before use, during use and after use. The greater the intensity of use, the more checks you need. Record the results of the inspection.
- The inspector must be competent or authorized by the manufacturer.
- Inspections included:
  - Check if the products are free of corrosion, melting, cracks, wear, deformation or stain;

-7-

| EQUIPMENT RECORD                                 |             |                                                                 |                                                                   |                                        |                                    |
|--------------------------------------------------|-------------|-----------------------------------------------------------------|-------------------------------------------------------------------|----------------------------------------|------------------------------------|
| Product:H5 Descender,                            |             |                                                                 |                                                                   |                                        |                                    |
| Model&type/identification type                   | Trade name  | Identification number                                           |                                                                   |                                        |                                    |
| Manufacturer                                     | Address     | Tel, fax, email and website                                     |                                                                   |                                        |                                    |
| XINDA                                            | China       | +86 400-8856993<br>info@xindaoutdoor.com<br>www.xindasafety.com |                                                                   |                                        |                                    |
| Year of manufacture/life expiry date             |             | Purchase date                                                   | Date first put into use                                           |                                        |                                    |
| Other relevant information(e.g. document number) |             |                                                                 |                                                                   |                                        |                                    |
| PERIODIC EXAMINATION AND REPAIR HISTORY          |             |                                                                 |                                                                   |                                        |                                    |
| Date                                             | Inspections | Reason for entry<br>(periodic examination or repair)            | Defects noted, repairs carried out and other relevant information | Name and signature of competent person | Periodic examination next due date |
|                                                  |             |                                                                 |                                                                   |                                        |                                    |
|                                                  |             |                                                                 |                                                                   |                                        |                                    |
|                                                  |             |                                                                 |                                                                   |                                        |                                    |
|                                                  |             |                                                                 |                                                                   |                                        |                                    |

-11-

#### REGULATION (EU) 2016/425.

Carabiner belongs to PPE (personal protective equipment)which is designed for climbing, caving, canyoning, rope access and rescue.

EN12275 is the standard of mountaineering equipment connectors.

EN12275B is for basic carabiners .  
Warning: Carabiners can not be used for industrial hoisting.

This product is compliant with, **EN 12275:2013 and REGULATION (EU) 2016/425.**

Notified body which carries out EU certification and product quality management according to Module D: Certificat issuance

Notified body: NO 1019: VVUÚ a.s., Pikartská 1337/7, Ostrava-Radvanice, 716 07, Czech Republic, phone: +420 596 252 111

CONFORMITY TO TYPE PROCEDURE  
Notified body:NO 2834:CCQS, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland

Please check the EU DECLARATION OF CONFORMITY on: [www.xindasafety.com](http://www.xindasafety.com)  
Acceptable temperature: -20℃~50℃.

#### CARABINER WITH LOCKING SYSTEM:

A.Screw gate: Turn the rotating cylinder by hand to lock.

#### STRENGTH:

MBS stands for minimum breaking strength.

-4-

-Check if the gate works or rotates well;  
-Check if the markings are illegible;  
You should maintain or retire the equipment, or hand to the manufacturer for further inspection when the results are negative such as deformation, malfunction of the gate.

○Information included on the inspection manual  
Model number/data matrix/purchase date/manufacture date/first time to use/standards/inspection date/records(mal-function, condition, user's usage record) /results and suggestions(to retire the equipment or not)/next inspection date/inspector's data(name and contact).

#### WHEN TO RETIRE YOUR EQUIPMENT:

- You don't know its usage history;
- You doubt about its performance, strength or safety;
- It fails to pass PPE inspection;
- Malfunctions are found;
- It fails to meet updated regulations or standards;
- It has been subjected to a major fall or load;

#### HOW TO RETIRE YOUR EQUIPMENT:

Mark it with irremovable labels or destroy it as to prevent further use. For instance, drill or cut it. Or return it to the manufacturer for disposal.

#### RESPONSIBILITIES:

- You are responsible for your actions and decisions. If you can not take the responsibilities, don't use it.
- Only qualified person or one under supervision of a competent and experienced person can use this product.

-8-